





TB 6 ON CTERM  
INTERFACE BOARD

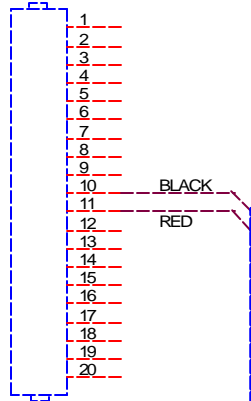

FAILSAFE CABLE



CUE DETECTOR CABLE

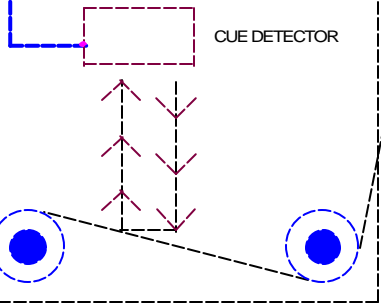

SERIES 1A & 1E AUTOMATIONS:  
J2 CUE DETECTOR INPUT ON MAIN BOARD

CUE DETECTOR FEED/INPUT



THE CUE DETECTOR FEED/INPUT DEFINITIONS ARE AS FOLLOWS:  
1=REGULATED 12VDC OUT TO CUE DETECTOR.  
2=GROUND TO CUE DETECTOR.  
3=NC  
4=CUE DETECTOR SIGNAL IN.

OPTICAL CUE CONTROL BOARD.

SEE DWG.ACUE FOR COMPLETE SCHEMATIC

WIRE COLORS FOR CUE SENSORS USED:

CUE BOARD JP1 PIN#	MEKontrol	LEUZE	SICK	PEPPERL FUCHS
1	RED	BROWN	RED	BROWN
2	BLACK	BLUE	BLUE	BLUE
3				
4	WHITE	BLACK	GREY	BLACK

(PIN 3 NOT USED ON SERIES 1A AUTOMATIONS)

BIG SKY INDUSTRIES  
259 CENTER ST.  
PHILLIPSBURG, NJ 08865

Title  
OPTICAL CUE DETECTOR IN CONSOLE

Size A	Document Number ACUEW.SCH	Rev
-----------	------------------------------	-----

Date: Wednesday, July 20, 2005 Sheet 0 of 0